



► Static dissipative and conductive flooring systems for...

ELECTRONIC ENVIRONMENTS

Welcome to Flowcrete Asia


With the ever growing investment in the electronics manufacturing industry across the Southeast Asia region and beyond, the demand for electrostatic sensitive manufacturing environments is as high as ever.







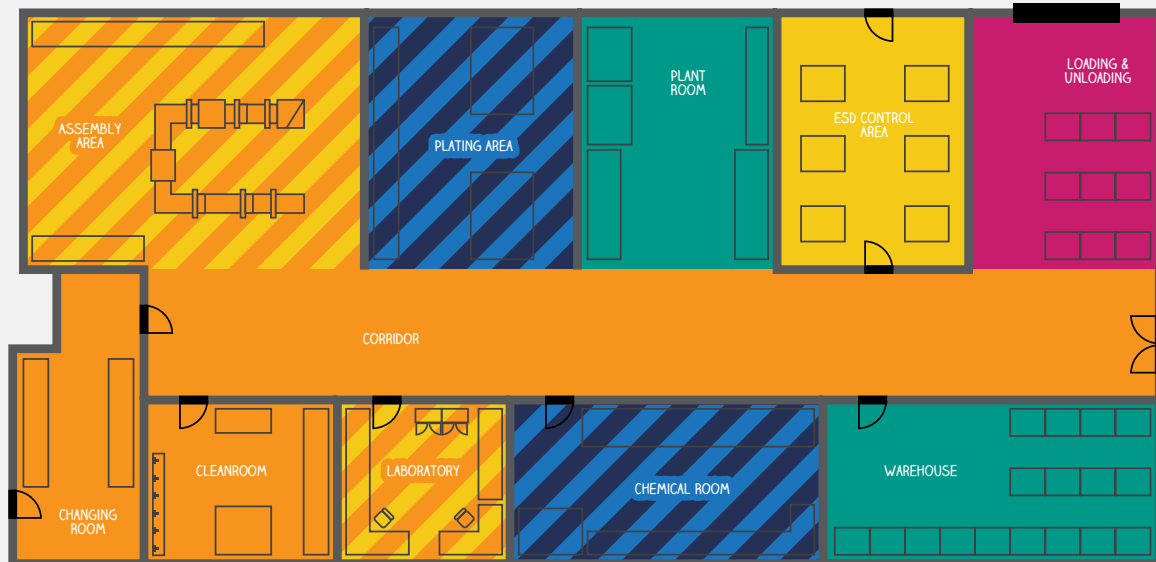

Flowcrete's range of anti-static flooring can help to safely dissipate the build-up of electrostatic charge whilst meeting BS2050, ANSI/ESD 2020, ASTM F150, IEC 61340-5-1 requirements.

Flowcrete's broad range of industrial grade solutions meets all of the specialised needs associated with the electronic manufacturing and processing industries, with anti-static, low VOC, heavy duty flooring systems, chemical resistant finishes and hygienic wall coating.

Operating from its manufacturing plant in Malaysia, and with warehousing facilities throughout Southeast Asia, Flowcrete Asia is well placed to serve electronic manufacturing environments across the region.

Electronics Environment Floor Plan



	Flowshield ESD Conductive		Flowshield UCR 1000		Flowcoat HTS
	Flowshield SL		Flowshield UCR 1000		Flowcoat SF41
	Flowshield ESD Conductive or Flowshield SL		Flowshield UCR 1000 or Flowchem VE GL		Flowseal EPW Wall Sealer or Flowgard WB

For the application suitability of each system, look out for the check mark symbol throughout the brochure.




What is ESD Flooring?

Electrostatic Discharge (ESD) refers to the rapid, spontaneous transfer of electrostatic charge induced by a high electrostatic field.

Charge can build-up while simply walking across the floor of a processing environment.

Without flooring materials equipped with adequate protection, that charge can be passed to sensitive electronic components, causing irreversible damage.

Systems are categorised as Conductive or Dissipative, determined using various testing methods.

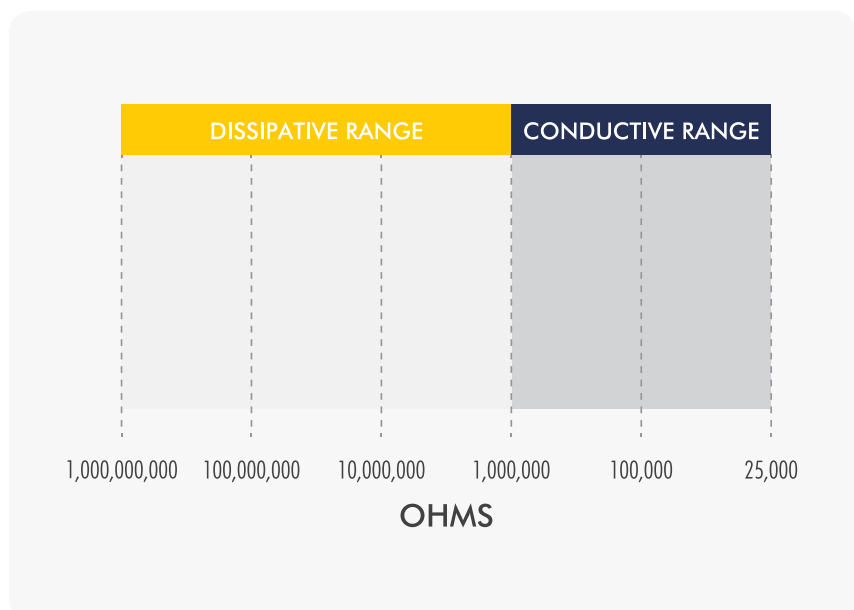

Flowshield ESD Conductive

(Thickness dependent on specification)



An anti-static epoxy resin floor finish that complies with BS2050, ANSI/ESDS2020, ASTM F150 Conductive, IEC 61340-4-1 and IEC 61340-4-5.

ESD CONTROL ROOMS, ASSEMBLY AREAS, LABORATORIES

Standard Colours



ELECTRICAL RESISTANCE

ASTM F150	$2.5 \times 10^4 - 1.0 \times 10^6 \Omega$
BS 2050	$5.0 \times 10^4 - 1.0 \times 10^8 \Omega$

BODY VOLTAGE GENERATION (BVG)

IEC 61340-4-5 and ANSI/ESD STM 97.1/97.2	<100 V
------------------------------------------	--------

COMPRESSIVE STRENGTH

BS 6319	60 N/mm ²
---------	----------------------

SLIP RESISTANCE

Method described in BS 7976-2 (typical values for 4-S rubber slider)	Dry >40, Wet depends on specification (in accordance with HSE and UKSRG guidelines)
----------------------------------------------------------------------	-------------------------------------------------------------------------------------



Flowcoat HTS

(Thickness dependent on specification)

A high performance, UV light stable, chemical resistant, extremely abrasion resistant pigmented hybrid polyurethane coating system. Flowcoat HTS is used primarily in heavily trafficked environments where durability is essential.

WAREHOUSES, PLANT ROOMS

Standard Colours



SLIP RESISTANCE

Method described in BS 7976-2 (typical values for 4-S rubber slider)	Dry >40, Wet depends on specification (in accordance with HSE and UKSRG guidelines)
----------------------------------------------------------------------	-------------------------------------------------------------------------------------

ABRASION RESISTANCE

Taber Abrader (1 kg load using CS10 wheels)	40 mg loss per 1000 cycles
BS 8204-2	Grade AR2

THERMAL RESISTANCE

Tolerant up to 70°C

Electrostatic Dissipative Flooring Comparison

	ESD CARPET TILE	ESD CARPET	ESD VINYL TILE	ESD VINYL SHEET	ESD EPOXY	ESD RUBBER
ESD PERFORMANCE	Excellent	Good	Excellent	Excellent	Excellent	Good
INSTALLATION COST	Moderate	Lowest	Low	Low	Moderate	Highest
DURABILITY	Not suitable for heavy loads	Not suitable for heavy loads	Excellent	Excellent	Superior	Good
HABITUAL CLEANING	Vacuum only	Vacuum only	Sweeping and damp mopping	Sweeping and damp mopping	Sweeping and damp mopping	Sweeping and damp mopping
MAINTENANCE	Hot water extraction as required	Hot water extraction as required	Buffing and waxing optional	Buffing and waxing optional	Buffing and waxing optional	Sealing optional
CHEMICAL RESISTANCE	Poor (not recommended)	Poor (not recommended)	Good	Good	Superior	Excellent
ACID, ALKALI & SOLVENT RESISTANCE	Poor (not recommended)	Poor (not recommended)	Good	Good	Superior	Excellent
COMPRESSIVE STRENGTH	N/A	N/A	Moderate	Low	Highest	Lowest
COLOUR THROUGHOUT	N/A	N/A	Yes (manufacturer specific)	Yes	Yes	Yes (manufacturer specific)
COLOUR CONSISTENCY FOR LARGE PROJECTS	Yes	Yes	Yes	Yes	Yes	Yes

Flowseal EPW Wall (0.2 mm)

A hygienic, pigmented, water-based epoxy wall sealer, suitable for environments where hygiene from floor to ceiling is critical. Flowseal EPW Wall has met the requirements of a number of cleanroom standards set out by the IPA, in accordance with the Cleanroom Suitable Materials test parameters.

WALLS, CEILINGS, CLEANROOMS


Standard Colours




White



Oyster



Silver Grey



Dolphin Grey



Sky Blue



Pale Green

FIRE RESISTANCE

EN 13501-1

B_{fl} - s1

TEMPERATURE RESISTANCE

Tolerant up to 60°C

VAPOUR PERMEABILITY

ASTM E96:90

20 g / m² / mm / 24hr

CHEMICAL RESISTANCE

Contact Technical Department

SPEED OF CURE**

10°C

20°C

30°C

Overcoating Time

16 hrs

8 hrs

6 hrs

Full Chemical Cure

14 days

7 days

6 days

**Cure times at temperatures between 0-30°C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

System Benefits



Delivers a seamless, hygienic & easy to clean finish



Vapour permeable so the substrate can breathe



Attractive finish to enhance workspaces

Flowseal EPW Wall Cleanroom Suitability



Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.



System Benefits



Delivers a seamless, hygienic & easy to clean finish



Attractive finish to enhance workspaces



Low odour application



Crack bridging

Flowgard WB (0.2 mm)


A single component water based polyurethane interior wall coating that provides a smooth, non yellowing, flexible and hygienic wall surface. Flowgard WB can be applied onto a variety of substrates including concrete, masonry, steel, wood and plastic.

WALLS, CEILINGS


Standard Colours




White



Oyster



Silver Grey



Dolphin Grey



Sky Blue



Pale Green

FIRE RESISTANCE

EN 13501-1

B_{fl} - s1

TEMPERATURE RESISTANCE

Tolerant up to 60°C

VAPOUR PERMEABILITY

ASTM E96:90

20 g / m² / mm / 24hr

CHEMICAL RESISTANCE

Contact Technical Department

SPEED OF CURE**

20°C

30°C

Surface Dry

1.5 hrs

1 hr

Hard Dry

5 hrs

3 hrs

Full Chemical Cure

7 days

6 days

**Cure times at temperatures between 0-30°C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

Flowshield UCR 1000 (1 mm)

An extremely chemical resistant, hard wearing, self-smoothing novolac epoxy resin flooring system that resists medium to heavy traffic.

PLATING AREAS, CHEMICAL ROOMS

Standard Colours



SLIP RESISTANCE

BS 7976-2 (typical values for 4-S rubber slider)	Dry >40, Wet depends on specification (in accordance with HSE and UKSRG guidelines)
--------------------------------------------------	-------------------------------------------------------------------------------------

ABRASION RESISTANCE

Taber Abrader (1kg load using CS17 wheels)	90mg loss per 1000 cycles
--------------------------------------------	---------------------------

COMPRESSIVE STRENGTH

BS 6319	>60 N/mm ²
---------	-----------------------

FLEXURAL STRENGTH

BS 6319	>40 N/mm ²
---------	-----------------------



Flowchem VE GL (1.5–3 mm)

A roller or spray applied vinyl ester based, fiberglass-reinforced lining system that provides excellent chemical and thermal resistance (up to 165°C). Flowchem VE GL protects concrete and metal structures subject to continuous or occasional exposure to aggressive chemicals, thermal and mechanical stress.

PLATING AREAS

Standard Colours



BARCOL HARDNESS

ASTM 2583	>30
-----------	-----

E-MODULUS

ASTM D-695	3.1 GPa
------------	---------

VOLUME SHRINKAGE*

ASTM D2566	7.5–9.8%
------------	----------

FLEXURAL STRENGTH*

ASTM D790	117–150 MPa
-----------	-------------

*Different resin types of Flowchem VE GL are available. Ranges are provided to cover results from all variations.



Flowshield SL (2–3 mm)

A high-gloss, self smoothing epoxy resin floor coating system that has met the requirements of a number of cleanroom standards set out by the IPA.

- ✓ ASSEMBLY AREAS, CORRIDORS, CLEANROOMS, LABORATORIES, CHANGING ROOMS

Standard Colours



TEMPERATURE RESISTANCE

Tolerant of sustained temperatures up to 60°C

SLIP RESISTANCE

Method described in BS 7976-2 (typical values for 4-S rubber slider)

Dry >40, Wet depends on specification (in accordance with HSE and UKSRG guidelines)

COMPRESSIVE STRENGTH

EN 13892-2

>50 N/mm²

FIRE RESISTANCE

EN 13501-1

B_{FL} - s1

WATER PERMEABILITY

Karsten Test

Nil (Impermeable)

ABRASION RESISTANCE

Taber Abrader (1 kg load using CS17 wheels)

90mg loss per 1000 cycles

FLEXURAL STRENGTH




EN 13892-2

>30 N/mm²

*Assumes concrete compressive strength is greater than 25 N/mm²

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

System Benefits

-  High chemical & abrasion resistance
-  Seamless, hygienic finish
-  Cleanroom Suitable Material (IPA)

Flowshield SL Cleanroom Suitability



Flowcoat SF41

(Thickness dependent on specification)

A chemical resistant, solvent free, high-build epoxy resin coating system with graded aggregates between coats for tailored slip resistance.

LOADING & UNLOADING

Standard Colours



SLIP RESISTANCE

Method described in BS 7976-2 (typical values for 4-S rubber slider)	Dry >40, Wet depends on specification (in accordance with HSE and UKSRG guidelines)
----------------------------------------------------------------------	-------------------------------------------------------------------------------------

ABRASION RESISTANCE

Taber Abrader (1 kg load using CS10 wheels)	80 mg loss per 1000 cycles
---------------------------------------------	----------------------------

COMPRESSIVE STRENGTH

BS 6319	>60 N/mm ²
---------	-----------------------


FLEXURAL STRENGTH

BS 6319	>40 N/mm ²
---------	-----------------------

Applied colours may differ from the examples shown. For a full technical profile, colour chart and samples, contact your local Flowcrete office.

Flowcrete Flooring Systems Summary

	THICKNESS	TYPE	DESCRIPTION
FLOWSHIELD ESD CONDUCTIVE	Dependent on specification	Epoxy	Anti-static self-smoothing epoxy resin floor finish.
FLOWCOAT HTS	Dependent on specification	Hybrid polyurethane	High performance hybrid polyurethane coating system.
FLOWSEAL EPW WALL	0.2mm	Epoxy	Hygienic, pigmented, water-based epoxy wall sealer.
FLOWGARD WB	0.2mm	Polyurethane	Single component water based polyurethane wall coating.
FLOWSHIELD UCR 1000	1mm	Novolac epoxy	Chemical resistant, self-smoothing novolac epoxy.
FLOWCHEM VE GL	1.5–3mm	Vinyl ester	Vinyl ester based, fiberglass-reinforced lining system.
FLOWSHIELD SL	2–3mm	Epoxy	High-gloss, self-smoothing epoxy resin floor finish.
FLOWCOAT SF41	Dependent on specification	Epoxy	High-build epoxy resin with graded aggregates.

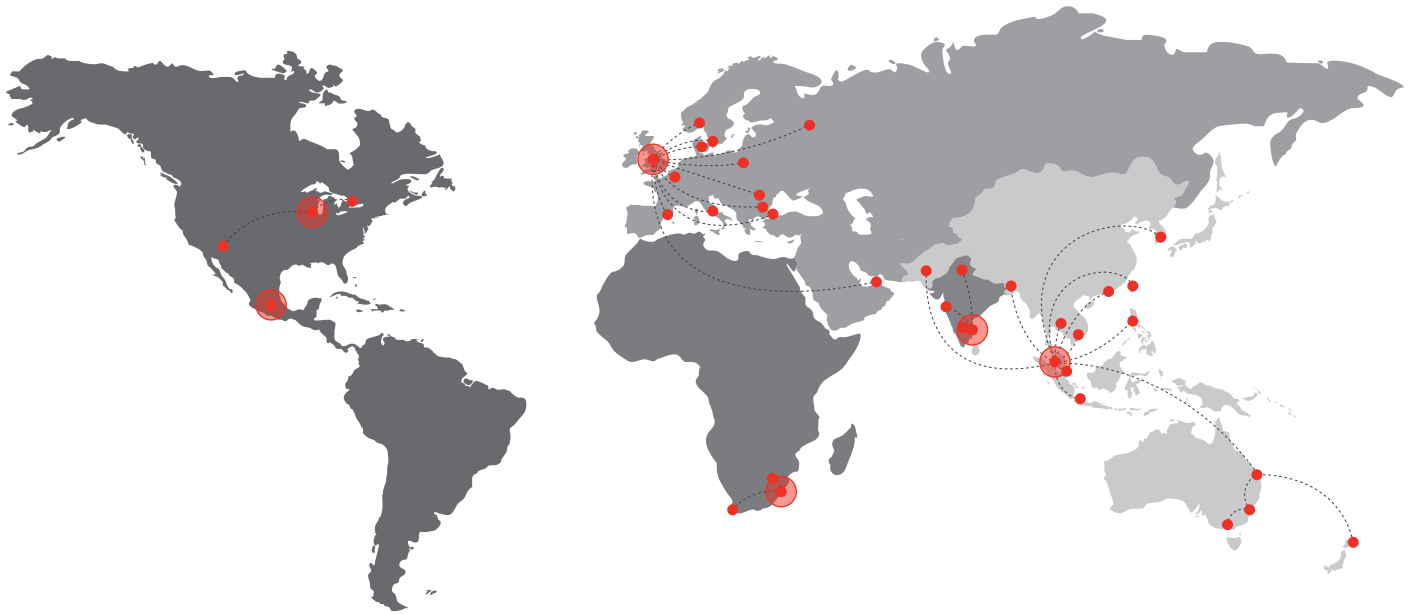

Flowcrete

World leader in seamless resin flooring solutions and other specialist coatings.

Africa

South Africa +27 31 701 0017 southafrica@flowcrete.com

Asia Pacific (APAC)

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+603 6277 9575	bangladesh@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Korea	+60 3 6277 9575	korea@flowcrete.com
Malaysia	+60 3 6277 9575	asia@flowcrete.com
New Zealand	+64 7 541 1221	newzealand@flowcrete.com
Pakistan	+60 3 6277 9575	pakistan@flowcrete.com
Philippines	+63 2 834 6506	philippines@flowcrete.com
Singapore	+65 6848 7166	singapore@flowcrete.com
Taiwan	+60 3 6277 9575	taiwan@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 28 6287 0846	vietnam@flowcrete.com

Europe & Middle East (EME)

Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 6486 0830	norway@flowcrete.com
Poland	+48 22 879 8907	poland@flowcrete.com
Romania	+40 766 596 991	romania@flowcrete.com
Russia	+7 916 931 3513	russia@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 212 2946570	turkey@flowcrete.com
UAE	+971 4 347 0460	uae@flowcrete.com
UK	+44 (0) 1270 753 000	uk@flowcrete.com

India

India +91 44 40176600 india@flowcrete.com

North America

Canada	+1 877-210-2444	canada@flowcrete.com
Mexico	+55 44 40 94 00	mexico@flowcrete.com
USA	+1 513-943-4225	americas@flowcrete.com