Flowcrete
for the world at your feet

Flowfast Decorative

A seamless, decorative MMA floor finish, developed for high traffic commercial and industrial environments.

A hard wearing solution ideal for use in commercial and industrial settings (dependant on the specification)

Attractive:
A glittery and decorative flaked floor finish that is available in a range of colours.

Fast Cure:
Fully trafficable just 2 hours after installation due to MMA formulation.

Easy to Clean:
The seamless finish allows the system to be easily cleaned.

Slip Resistant:
Textured finish provides a safe environment for visitors.

Minimises Visible Scratches:
Speckled flake finish disguises visible surface scratches.

Hard-Wearing:
Hard-wearing & abrasion resistant suitable for medium to heavy traffic.



Technical Profile*


FIRE RESISTANCE	
EN 13501-1	C_{fl} - s1
SLIP RESISTANCE**	
Method described in BS 7976-2 (typical values for 4-S rubber slider)	Dry>40, Wet depends on specification (in accordance with HSE and UKSRG guidelines)
THERMAL RESISTANCE	
Tolerant of sustained temperatures up to 50°C	
WATER PERMEABILITY	
Nil – Karsten test (impermeable)	
ABRASION RESISTANCE	
BS8204:Part 2:2002	Class AR2 - Medium duty industrial and commercial
CHEMICAL RESISTANCE	
Contact Technical Department	
BOND STRENGTH	
Greater than cohesive strength of 25 N/mm² concrete. >1.5 MPa	
IMPACT RESISTANCE	
EN ISO 6272	10 Nm
SPEED OF CURE	
Light Traffic	1h
Full Traffic	2 - 3h

Cure at ambient temperatures in the range 0°C to 30°C can be achieved by altering the quantity of catalyst used. For applications below 0°C, please consult our Technical Department.

* These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.

**The slipperiness of flooring materials can change significantly, due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.


Flowfast Terrosso

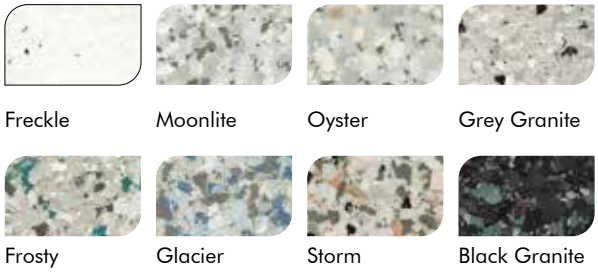

Freckle | Moonlite | Oyster | Grey Granite

Frosty | Glacier | Storm | Black Granite

Flowfast Kristalina

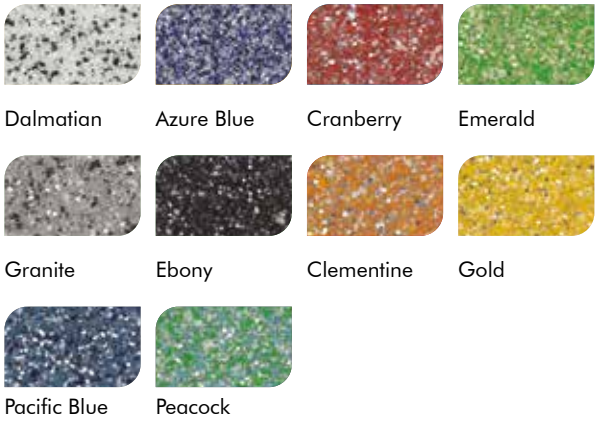


Dalmatian | Azure Blue | Cranberry | Emerald

Granite | Ebony | Clementine | Gold

Pacific Blue | Peacock

Flowfast Quartz Scatter

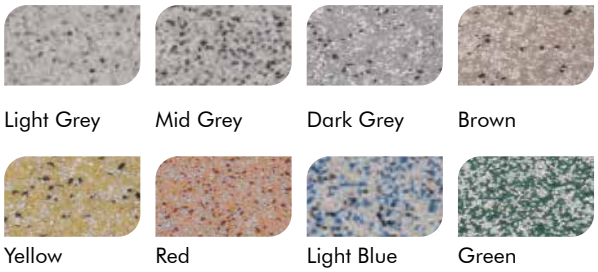

Light Grey | Mid Grey | Dark Grey | Brown

Yellow | Red | Light Blue | Green

The applied colours may differ from the examples shown.
For a full colour chart and samples, contact your local Flowcrete office.

Model Specification

System	Flowfast Decorative
Finish	Satin
Thickness	Dependant on specification
Manufacturer	Tremco CPG Malaysia

Preparatory work and application in accordance with manufacturer's instructions

Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm^2, free from laitance, dust and other contamination. The substrate should be dry up to 75% RH as per BS8204 and free from rising damp and ground water pressure. A special Flowfast primer can be used for substrates up to 100% RH (surface dry).

Installation Service

The installation should be carried out by a licensed contractor with a documented quality assurance scheme. For details of our licensed contractors, contact our customer service team or enquire via our website at www.flowcreteasia.com

Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

Aftercare, Cleaning & Maintenance

Clean floor regularly using a rotary scrubber in conjunction with a mildly alkaline detergent (without solvent).

Important Note

Flowcrete products are guaranteed against defective materials and manufacture and are sold subject to our standard 'Warranty, Terms and Conditions of Sale', copies of which can be obtained on request. Warranty does not cover suitability, fit for purpose or any consequential or related damages.

Further Information

To ensure you are specifying a fit-for-purpose floor, please consult our Technical Advisors or visit our website to register your interest in specifying one of the most durable floors on the market.

[20/10/26]

1. Light colours may require additional coats to achieve desired results 2. It is recommended that top coat colours are close to base coats colours to achieve desired results
3. This product is not UV stable and may discolour unless otherwise stated 4. System Data Sheet to be read in conjunction with Method Statement and Product data Sheets.

To find your nearest office information visit: www.flowcreteasia.com