

Flowcrete
for the world at your feet

Isocrete
floor screeds



ISOCRETE FLOOR SCREEDS

► A range of floor grouts & screeds designed to deliver the necessary strength required to install a quality floor finish.

www.flowcreteasia.com

Isocrete Floor Screeds Technical Profile



Flowcrete Asia's range of Isocrete Floor Screeds offer numerous advantages for use in both new build and refurbishment projects.

We are committed to the development of sustainable and environmentally friendly products and our Isocrete Floor Screeds range is no exception. Our screeds use by-products from heavy industry waste streams and reduce clean water consumption in screed construction.

What's more, some of our systems are even OPC (Ordinary Portland Cement) free, reducing carbon emissions. Our fast track screeds are less labour intensive than others, offering faster drying times to improve construction schedules across sectors where time saving is crucial.

With a huge portfolio of products to choose from, Isocrete Floor Screeds are versatile in application delivering reduced shrinkage, superior compressive strengths and impressive thermal conductivity in conjunction with under floor heating.

Application Suitability



Healthcare



Education



Residential



Leisure



Airports



Retail



Transport



Industrial



Product Selector

	DESCRIPTION	USES	FOOT TRAFFIC 20 °C	FLOOR FINISH	THICKNESS
Isocrete K-Screed	Strong and quick drying trowel applied proprietary cement sand screed.	General commercial use.	24 hours	After curing normally 1 week / 25 mm	15–75 mm
Isocrete Heavy Duty K-Screed	Systems available for weight saving, thermal insulation and impact sound insulations.	Highly trafficked areas.	24 hours	After curing normally 1 week / 25 mm	30–75 mm
Isocrete 1500	A rapid drying, pre-mixed, self-levelling cement based flooring compound free from protein.	Universal underlayment which can be applied by hand or pump.	2 hours	1 day / 10 mm	4–20 mm
Isocrete Self Level Plus	Protein free, pumped, self-levelling, pre mixed cement based underlayment.	General commercial use.	2–4 hours	1 day	2–4 mm
Flowscreed Industrial Top	A quick drying, cement based screed for levelling floors, laid via pump or hand.	Fast track refurbishment and new construction in factories and warehouses.	2–4 hours	1 day	4–20 mm

*The above information indicates typical data given under suitable conditions and may vary accordingly.



FM 41035

Application Suitability

- | | |
|---|---|
| ✓ | Shopping concourses and department stores |
| ✓ | Airport terminals and train stations |
| ✓ | Hospital corridors |
| ✓ | Stock rooms |
| ✓ | Lobbies and reception areas |
| ✓ | Plant rooms |



Isocrete K-Screed (15–75 mm)

A semi-dry cementitious screed, incorporating proprietary additives to produce an early drying and high strength screed with excellent impact resistance.

Designed to speed up construction schedules, the system can be modified to produce Heavy Duty K-Screed and is suitable for high traffic areas such as transport and retail concourses.



Versatile Application:

Machine or hand applied only by approved licensees for a reliable finish.



Strength:

High resistance to impact, largely increased with heavy-duty variety.



Durable:

Holds its own against sustained foot traffic in busy commercial spaces.



Fast Cure:

Cures within a couple of hours to allow for floor finishes to be applied.



Approved:

Certified by the British Board of Agrément, Certificate No. 91/2678.




Technical Profile

APPLICATION SUITABILITY		
New build	Refurbishment	
APPLICATION TYPE		
Bonded	Unbonded	Floating
COMPRESSIVE STRENGTH: STANDARD K-SCREED		
BS EN 196-1	>25 N/mm ²	
COMPRESSIVE STRENGTH: HEAVY DUTY K-SCREED		
BS EN 196-1	>30 N/mm ²	
DENSITY		
1,800–2,000 kg / m ³		
BRE TEST CATEGORY		
BS 8204-1	Category A	

SPEED OF CURE**	10 °C	20 °C	30 °C
Working Time	2–3 hrs	2 hrs	1.5 hrs
Light Foot Traffic	48 hrs	24 hrs	20 hrs
Full Traffic	7 days	7 days	7 days
Curing Under Polythene	7 days	7 days	7 days

Bonded Screed

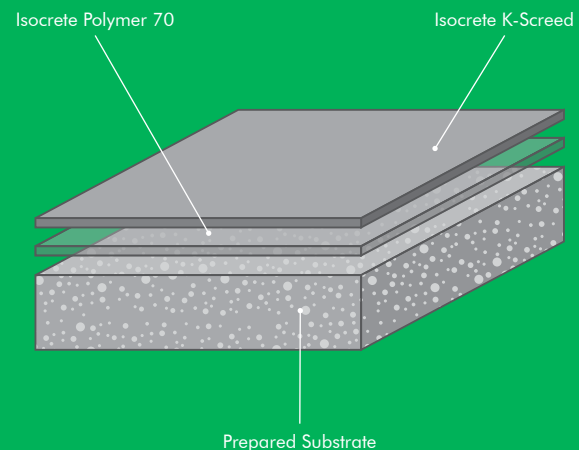

** Cure times at temperatures between 0–30 °C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

Isocrete 1500 (4–20 mm)

A fast drying, cement based underlayment allowing surfaces to be easily levelled prior to the installation of floor coverings.

Ideal for refurbishment and construction schedules, this self-smoothing screed offers a level platform for numerous floor types whilst delivering an easy, rapid installation process via pump or hand.



Versatile Application:

Hand or pump applied with a self-levelling finish.



Durable:

Holds its own against sustained foot traffic in busy commercial spaces.



Fast Cure:

Fast track installation, setting and drying times.



Protein Free:


System will not harbour bacteria, ideal for biologically sensitive applications.



Technical Profile

APPLICATION SUITABILITY	
New build	Refurbishment
APPLICATION TYPE	
Bonded	
COMPRESSIVE STRENGTH (28 DAYS)	
BS EN 196	30 N/mm ²
SHRINKAGE	
<0.06%	
ADHESION TO C30 CONCRETE	
>1 N/mm ²	
FIRE RESISTANCE	
BS 476-7 Spread of flame	Class 1
THERMAL RESISTANCE	
Tolerant of sustained temperatures up to 50 °C	
IMPACT RESISTANCE	
BS 8204-1	Category A

SPEED OF CURE**	10 °C	20 °C
Walk On	4–8 hrs	2–4 hrs
Full Traffic	2 days	2 days

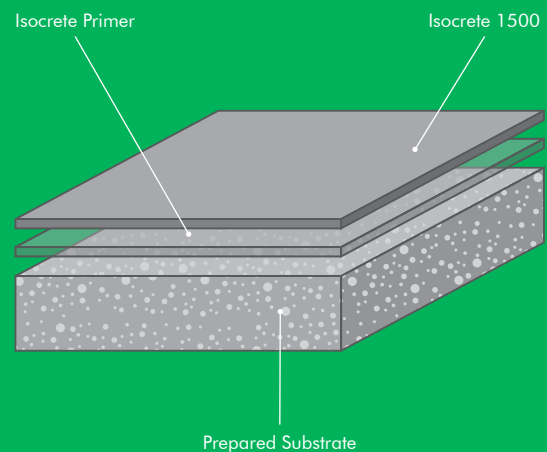

** Cure times at temperatures between 0-30 °C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.



Application Suitability

✓	Schools
✓	Retail outlets
✓	Hospitals
✓	Airports
✓	Prisons
✓	Offices
✓	Stadiums

Isocrete Self Level Plus

(2–4 mm)

A strong, fast drying, cement-based underlayment allowing screeds to be easily levelled prior to the installation of floor finishes.

Delivering fast setting and drying times, this screed is ideal for busy industries that would benefit from minimised downtime.



Versatile Application:

Hand or pump applied with a self-levelling finish.



Durable:

Holds its own against sustained foot traffic in busy commercial spaces.



Fast Cure:

Fast track installation, setting and drying times.



Protein Free:


System will not harbour bacteria, ideal for biologically sensitive applications.



Technical Profile

APPLICATION SUITABILITY	
New build	Refurbishment
APPLICATION TYPE	
Bonded	
COMPRESSIVE STRENGTH (28 DAYS)	
BS EN 196	24 N/mm ²
SHRINKAGE	
<0.06%	
ADHESION TO C30 CONCRETE	
>1 N/mm ²	
FIRE RESISTANCE	
BS 476-7 Spread of flame	Class 1
IMPACT RESISTANCE	
BS 8204-1	Category A

SPEED OF CURE**	10°C	20°C
Walk On	4–8 hrs	2–4 hrs
Full Traffic	2 days	2 days

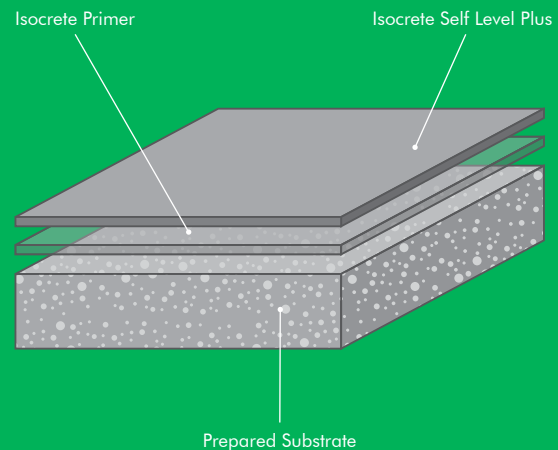

** Cure times at temperatures between 0–30°C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.



Application Suitability

✓	Schools
✓	Retail outlets
✓	Hospitals
✓	Airports
✓	Prisons
✓	Offices
✓	Hotels
✓	Factories



Flowscreed Industrial Top

(4–20 mm)

A single component, quick drying, cement based screed for levelling floors, laid via pump or hand.

Strong and durable, this screed is used for fast track refurbishment and new construction where there is a demand for a smooth surface such as in factories and warehouses.



Versatile Application:

Hand or pump applied with a smooth finish.



Strength:

High strength and durability against general wear and tear.



Fast Cure:

Fast drying times to minimise construction schedules.



Protein Free:

System will not harbour bacteria, ideal for biologically sensitive applications.




Technical Profile


APPLICATION SUITABILITY	
New build	Refurbishment
COMPRESSIVE STRENGTH (28 DAYS)	
35 N/mm ²	
ADHESION TO C30 CONCRETE	
>1 N/mm ²	
PROTEIN CONTENT	
Nil	
RECOMMENDED THICKNESS	
By hand	4–20 mm
By pump	7–20 mm

SPEED OF CURE**	20°C
Working Time	20 mins
Walk On	2–4 hrs
Overcoating Time (10 mm)	1 day*

*Dependant upon thickness, ambient and substrate conditions.

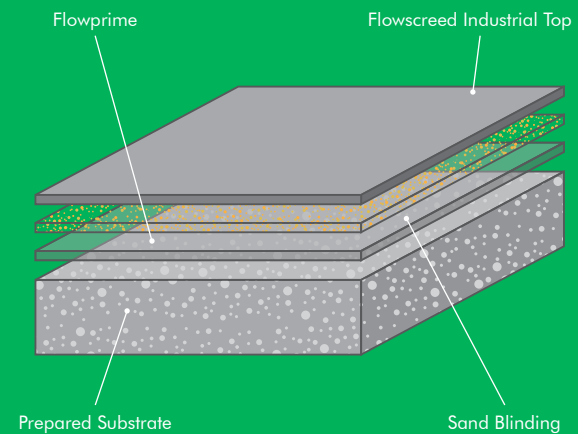

** Cure times at temperatures between 0–30°C can be achieved by altering the quantity of catalyst used. For applications falling outside of this temperature range, please contact your local Flowcrete Technical Department.

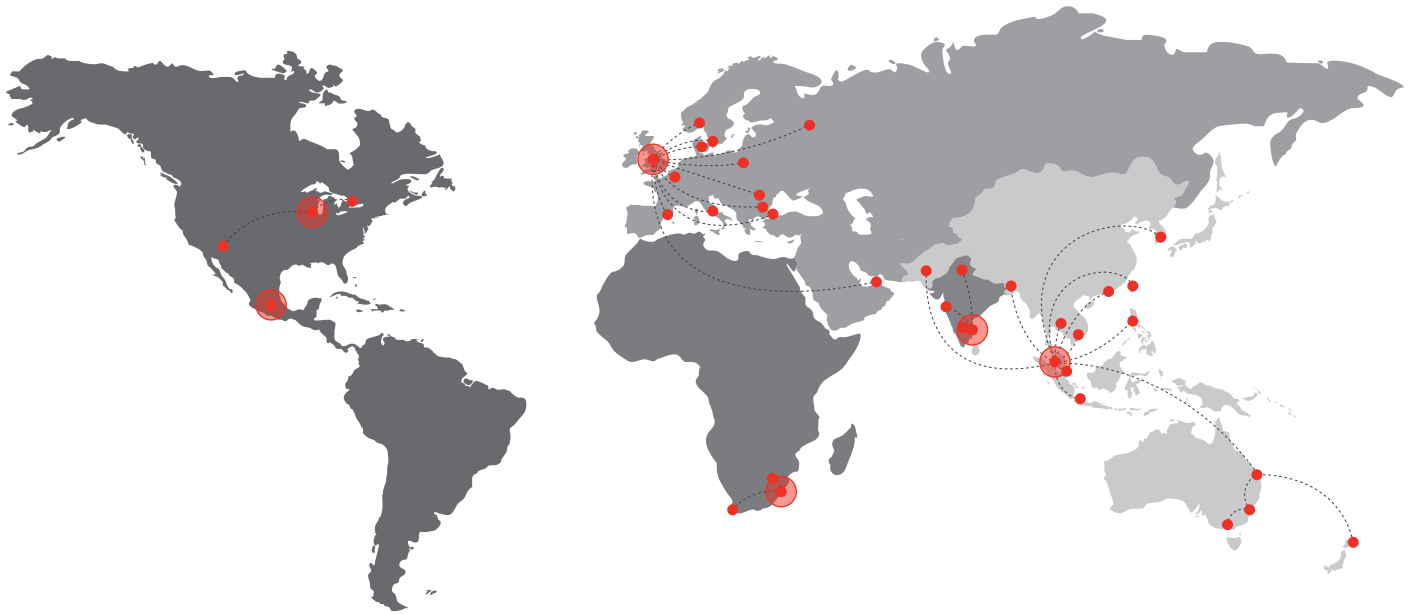

Flowcrete

World leader in seamless resin flooring solutions and other specialist coatings.

Africa

South Africa +27 31 701 0017 southafrica@flowcrete.com

Asia Pacific (APAC)

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+603 6277 9575	bangladesh@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Korea	+60 3 6277 9575	korea@flowcrete.com
Malaysia	+60 3 6277 9575	asia@flowcrete.com
New Zealand	+64 7 541 1221	newzealand@flowcrete.com
Pakistan	+60 3 6277 9575	pakistan@flowcrete.com
Philippines	+63 2 834 6506	philippines@flowcrete.com
Singapore	+65 6848 7166	singapore@flowcrete.com
Taiwan	+60 3 6277 9575	taiwan@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 28 6287 0846	vietnam@flowcrete.com

Europe & Middle East (EME)

Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 6486 0830	norway@flowcrete.com
Poland	+48 22 879 8907	poland@flowcrete.com
Romania	+40 766 596 991	romania@flowcrete.com
Russia	+7 916 931 3513	russia@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 212 2946570	turkey@flowcrete.com
UAE	+971 4 347 0460	uae@flowcrete.com
UK	+44 (0) 1270 753 000	uk@flowcrete.com

India

India +91 44 40176600 india@flowcrete.com

North America

Canada	+1 877-210-2444	canada@flowcrete.com
Mexico	+55 44 40 94 00	mexico@flowcrete.com
USA	+1 513-943-4225	americas@flowcrete.com

*Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, Flowcrete reserves the right to change product specifications at any time without prior notice. The photographs and colours reproduced in this publication are within the constraints of the printing process and are not to be used for matching purposes. All photographs are used for approximate representation only and may not show the actual products on offer. E&OE.