



032-089-4135  
Environmentally Preferred Coating  
& Surface Coatings

## Flowshield ESD CR Dissipative

An antistatic, highly chemical resistant epoxy floor coating that complies with a variety of electrical dissipation requirements.

For use in areas where chemical resistance and conductive ESD standards are required.



### Antistatic:

Meets ANSI/ESD S7.1 and ASTM F150 Dissipative requirements.



### Highly Chemical Resistant:

Protects against a range of chemicals used in manufacturing processes.



### Hard-Wearing:

Hard-wearing & abrasion resistant suitable for medium to heavy traffic.



Sand

Chilli Red

Steel Blue

Mid Blue



Light Green

Dark Green

Sage Grey

Mist Grey



Steel Grey

The applied colours may differ from the examples shown.  
For a full colour chart and samples, contact your local Flowcrete office.



## Technical Profile\*

### FIRE RESISTANCE

EN 13501-1

B<sub>fl</sub> - s1

### SLIP RESISTANCE\*\*

Method described in  
BS 7976-2 (typical values  
for 4-S rubber slider)

Dry > 40, Wet depends on  
specification (in accordance with  
HSE and UKSRG guidelines)

### THERMAL RESISTANCE

Softens over 60°C

### WATER PERMEABILITY

Nil – Karsten test (impermeable)

### CHEMICAL RESISTANCE

Contact Technical Department

### ABRASION RESISTANCE

Taber Abrader  
(1 kg load using CS17 wheels)

80 mg loss per 1000 cycles

### COMPRESSIVE STRENGTH

EN 13892-2

60 N/mm<sup>2</sup>

### FLEXURAL STRENGTH

EN 13892-2

40 N/mm<sup>2</sup>

### TENSILE STRENGTH

BS 6319

25 N/mm<sup>2</sup>

### BOND STRENGTH

Greater than cohesive strength of 25 N/mm<sup>2</sup> concrete. > 1.5 MPa

### ELECTRICAL RESISTANCE

ASTM F150

1.0 x 10<sup>6</sup> – 1.0 x 10<sup>9</sup> Ω

### SPEED OF CURE

10 °C

20 °C

30 °C

Light Traffic

36 h

24 h

16 h

Full Traffic

72 h

48 h

36 h

Full Chemical Cure

12 d

7 d

6 d

\* These figures are typical properties achieved in laboratory tests at 20°C and at 50% Relative Humidity.


\*\*The slipperiness of flooring materials can change significantly, due to the installation process, after short periods of use, due to inappropriate maintenance, longer-term wear and/or surface contaminants (wet or dry). Textured systems are recommended to meet slip resistance value requirements for wet conditions and/or surface contaminants (wet or dry) - please contact our Technical Advisors for further details and specifications.

## Model Specification

System	Flowshield ESD CR Dissipative
Finish	Gloss
Thickness	Dependant on specification
Manufacturer	Flowcrete Asia

Preparatory work and application in accordance with manufacturer's instructions.

## System Design

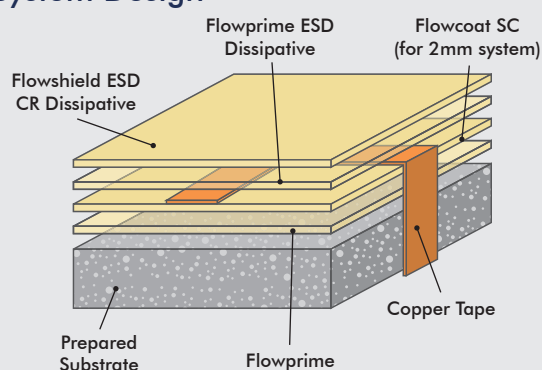

## Products Included In This System

Primer	Flowprime
Scratch Coat	Flowcoat SC (for 2mm system)
Copper Tape	(conductive grid of 10 mm wide copper tape)
Antistatic Primer	Flowprime ESD Dissipative
Finishing Coat	Flowshield ESD CR Dissipative

Detailed application instructions are available upon request.

## Substrate Requirements

Concrete or screed substrate should be a minimum of 25N/mm<sup>2</sup>, free from laitance, dust and other contamination. The substrate should be dry up to 75% RH as per BS8204 and free from rising damp and ground water pressure. Application of a 1mm self-smoothing product also requires a smooth substrate.

## Installation Service

The installation should be carried out by a licensed contractor with a documented quality assurance scheme. For details of our licensed contractors, contact our customer service team or enquire via our website at [www.flowcreteasia.com](http://www.flowcreteasia.com)

## Environmental Considerations

The finished system is assessed as non-hazardous to health and the environment. The long service life and seamless surface reduce the need for repairs, maintenance and cleaning. Environmental and health considerations are controlled during manufacture and application of the products by Flowcrete staff and fully trained and experienced contractors.

## Conductive Tape

A network of 12 mm wide, self-adhesive, conductive copper tape is always recommended in combination with any Flowcrete antistatic flooring system. The copper tape must be applied directly onto the cured Flowprime, maximum 1 metre in from the perimeter of the application. Further, strips of tape should be applied within this area every 3 metres. Special attention should be paid to tape areas passing over expansion or bay joints to ensure permanent electrical continuity. The applied tape should be secure and fully bonded to a confirmed earth point.

## Aftercare, Cleaning & Maintenance

Clean regularly using a single or double headed rotary scrubber drier in conjunction with a mildly alkaline detergent. Ensure that the floor is not abraded during cleaning and that the cleaning agent does not deposit a layer of wax or residue on the surface as this will impair the antistatic properties of the floor.

## Important Note

Flowcrete products are guaranteed against defective materials and manufacture and are sold subject to our standard 'Warranty, Terms and Conditions of Sale', copies of which can be obtained on request. Warranty does not cover suitability, fit for purpose or any consequential or related damages.

## Further Information

To ensure you are specifying a fit-for-purpose floor, please consult our Technical Advisors or visit our website to register your interest in specifying one of the most durable floors on the market.

1. Light colours may require additional coats to achieve desired results 2. It is recommended that top coat colours are close to base coats colours to achieve desired results  
3. This product is not UV stable and may discolour unless otherwise stated 4. System Data Sheet to be read in conjunction with Method Statement and Product data Sheets.